




# SEDIMENT

Porcelain Floor & Wall Tile

Beige 24" x 48" x 5/16"




**Sediment White 12x24**  
12" x 24" x 5/16"  
IF01224SW




**Sediment Light Gray 12x24**  
12" x 24" x 5/16"  
IF01224SLG



**Sediment Beige 12x24**  
12" x 24" x 5/16"  
IF01224SB

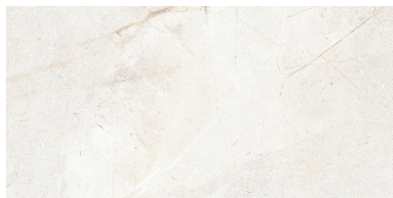

**Sediment White 24x48**  
24" x 48" x 5/16"  
IF02448SW

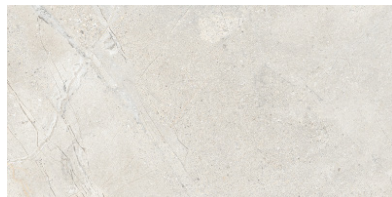

**Sediment Light Gray 24x48**  
24" x 48" x 5/16"  
IF02448SLG



**Sediment Beige 24x48**  
24" x 48" x 5/16"  
IF02448SB



**Sediment Taupe 12x24**  
12" x 24" x 5/16"  
IF01224ST



**Sediment Taupe 24x48**  
24" x 48" x 5/16"  
IF02448ST

## TECHNICAL SPECIFICATIONS

PRODUCT PERFORMANCE	RESULT
Water Absorption	<0.1%
Modulus of Rupture	>45N/mm <sup>2</sup>
Breaking Strength	≥700N
Thermal Shock Resistance	Resistant
Color Shade Variation	V2
MOHS Hardness	7
Chemical Resistance HH Chemical Resistance	HA/LA A
DCOF	>0.42 / R10
Recommended Grout Joint	1/16"
Stain Resistance	Class 5

View all of our product options and detailed specifications at: [mlwsurfaces.com](http://mlwsurfaces.com).

## GET IN TOUCH

orders@mlwalker.com

3045 Kingston Court  
Norcross, GA 30071

www.mlwsurfaces.com